




1

With the umbrella closed and standing, loosen the canopy by tugging on the pockets, and pulling them off the ends of the long arms.



2

Remove the finial from the top of the frame by removing the Phillips head screw that attaches it to the upper hub.

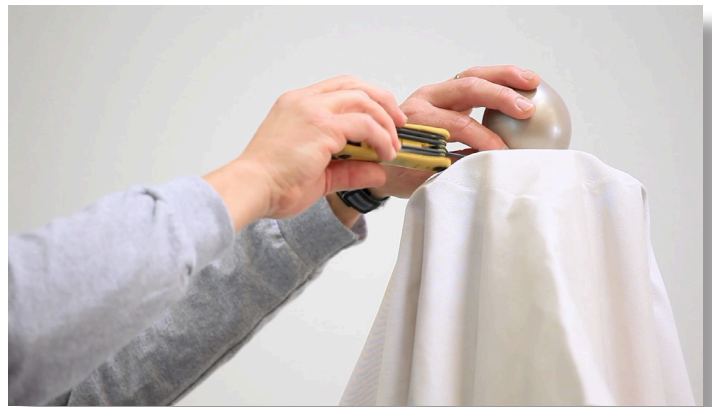

3

Slip the old canopy off the frame.



4

Slip on the new canopy, and align the pockets with the arms on the frame.





5

Re-attach the finial with the Phillip's head screw.



6

Place the long arms in the pockets of the canopy, by tugging on the pockets and slipping them over the arms.



7

Open the umbrella, to ensure the canopy has stretched completely.

