

REPLACEMENT FINIAL

TOOLS NEEDED




CORDLESS DRILL WITH A 1/8" HEX BIT

INSTRUCTIONS

1 Prepare for Removal

- Close the umbrella, remove it from its base, and lay it on its side on a table.
- Locate the hex bolt holding the finial in place.

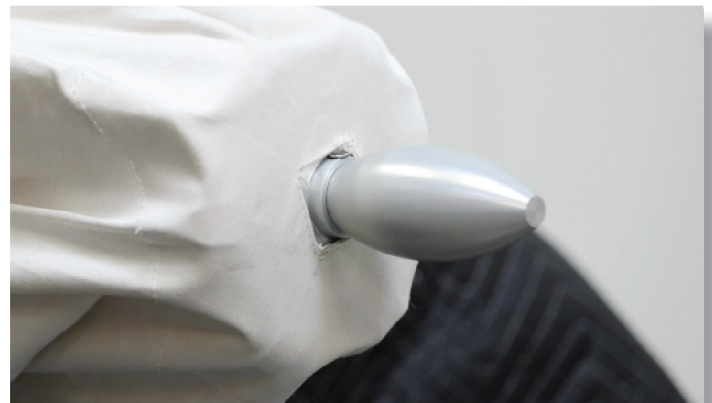

2 Remove the Old Finial

- Use the cordless drill to remove the hex bolt.



- Remove the old finial from the umbrella.





3

Install the New Finial

- Place the new finial into the appropriate position on the umbrella.
-



- Screw the hex bolt back into the base of the new finial, securing it in place.
-

