



# RIVIERA REPLACEMENT ARM Installation Instructions

Video: <https://vimeo.com/703494317>

Questions? 800.919.9464

1

Remove the umbrella from the base, and lay it on its side.




2

Partially remove the umbrella cover by slipping the ends of the arms out of the fabric pockets. To do this, simply tug on the fabric pocket, then gently pull it back and out of the way.




3

Remove the broken arm by separating it from the short arm . . .

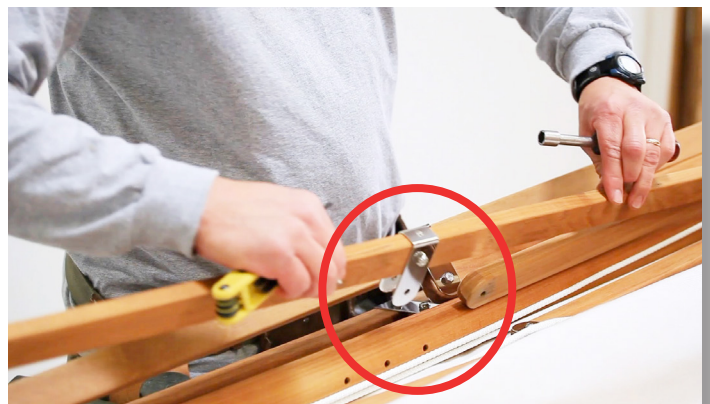

4

. . . and the upper hub.

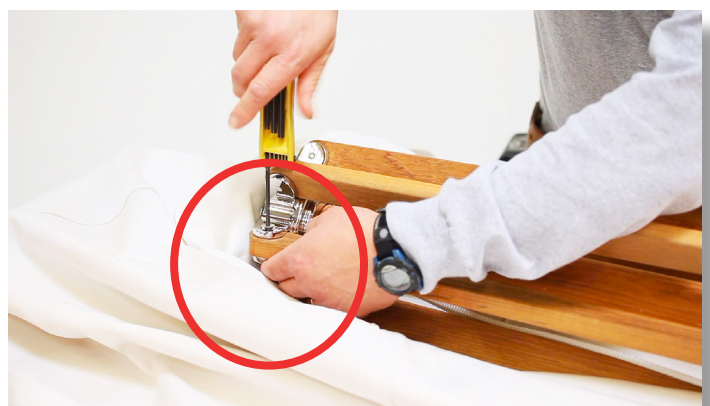



5

Install the new arm by securing it to the short arm.



6

Complete the installation by attaching the end of the arm to the upper hub.



7

Replace the canopy by stretching the cover over the tips of the long arms, and into the pockets.



8

Place the umbrella in the base, and open it to ensure the arm is working properly.

